



Installation Instruction for ACE-Short Drum Cavity Series

#### 1.Assemble the stand

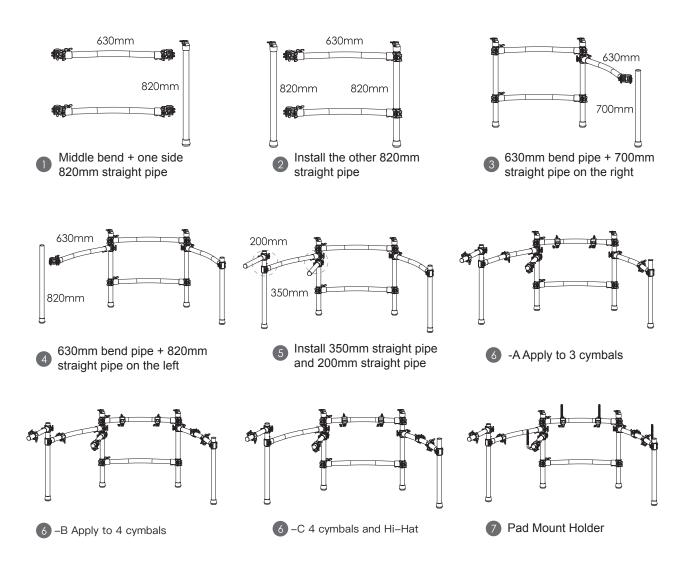


• According to above figure, to assemble the stand and pad in turn

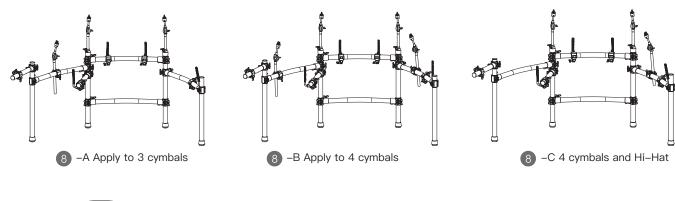



- Expand the stand according to the arrow
- According to above figure, to assemble the stand and pad in turn


## 2. Assemble the pad

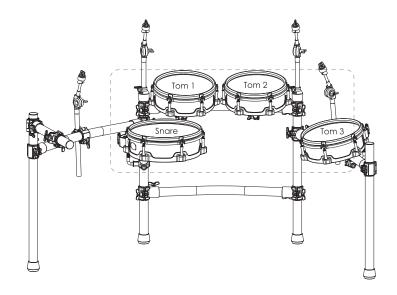




• Insert pad mount and tighten the wing nut


# 3-A . Attach the cymbals

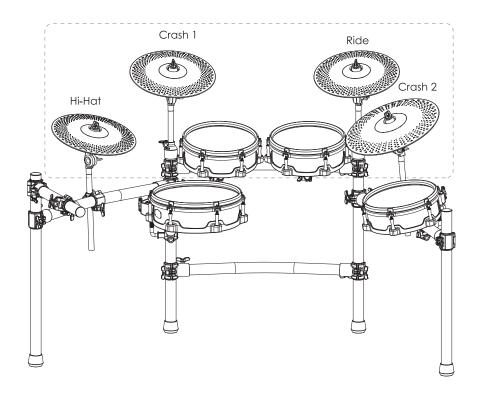


\_\_\_\_\_\_




#### 3.-B Install the Hi-Hat stand

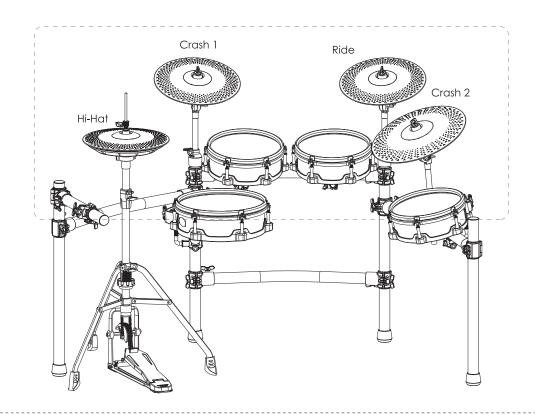


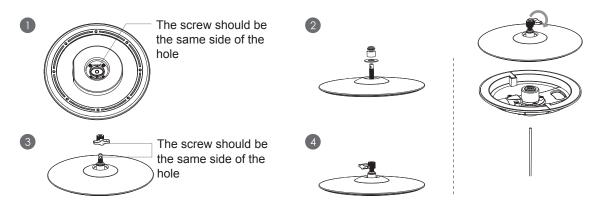

### 4. Attach the Sound Module

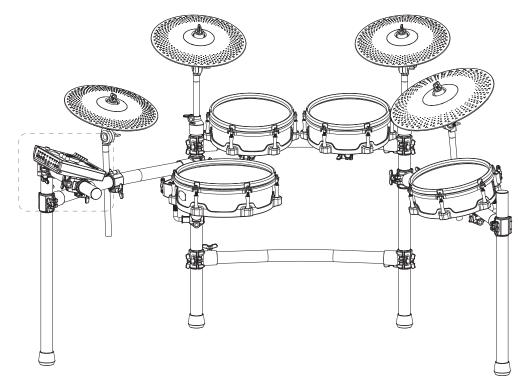



\_\_\_\_\_



- connect DB25 Audio cable and fix it.
- insert sound module and adjust wing konb to fix it

#### 5.Attach the Kick Pedal

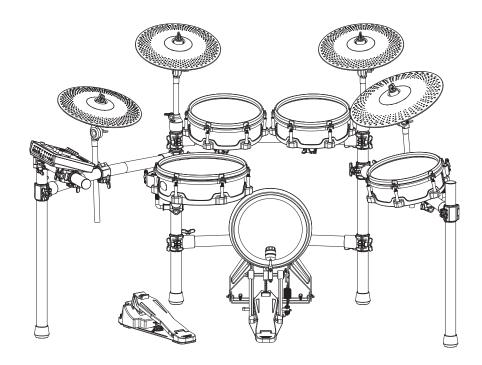




- Open the kick drum stand entirely and lock the screw at sides
  Install the beater into the holder securely by fixing the screw
- Install the kick pedal securely



On the blanket




On the floor



Position beater at the center of kick drum


### 6. Power Connection & Wiring

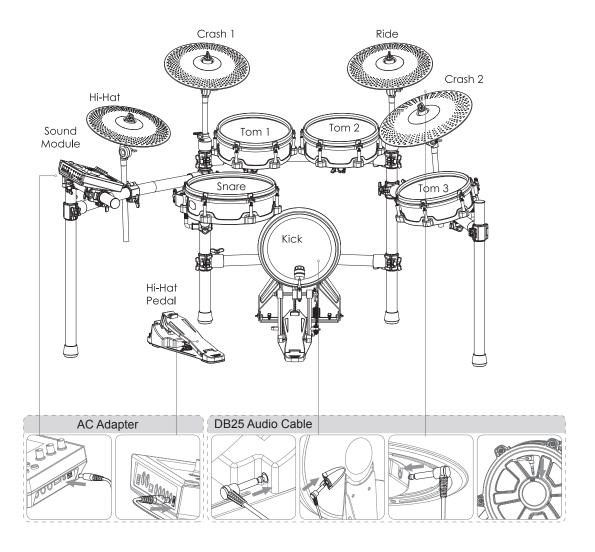


• To connect the jacks as shown in the figure, and using cable clip to organize the cables

### 7. Power Connection & Wiring

Pads: (Snare, Tom 1/2/3)




Cymbals: (Hi-Hat, Crash, Ride)



Pedal



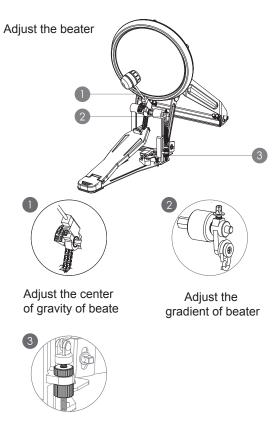

Adjust the tightness of spring

# Complete the installation according to the installation guide of the model you purchased

